

# CATEGORY 5E UTP PATCHCORD



The electrical performance of these patchcords exceeds TIA/EIA and ISO/IEC class E specifications and are fully backward compatible with Category 5 cable and connectors. Improved anti-snag feature provides maximum protection from snagging during moves and rearrangements.

### ★ Features

- 24 AWG stranded bare copper
- Good margin in channel test
- PVC sheath or LSZH sheath
- Universal TIA/EIA 568A or TIA/EIA 568B wire map
- Various lengths and colors


### 🔧 Physical Specifications

Contact material	Phosphor bronze
Contact plating	Gold 50 micro-inch; nickle 100 micro-inch
Operating temperature	14°F to 140°F [-20°C to 60°C]

### ⚡ Electrical Specifications

TIA/EIA category	5e
------------------	----

### 🔍 Hardware Test

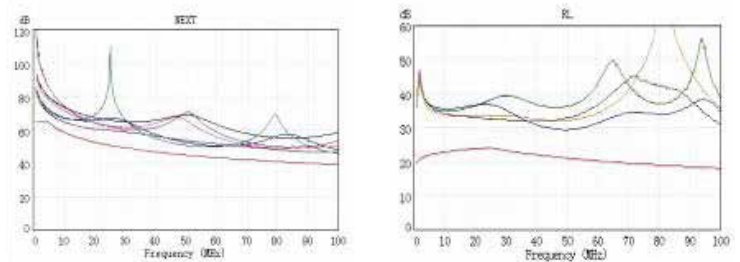

### 🛒 Ordering Information

Product Number	Description	Flame	Color
SKP5UM005GY	0.5m cat 5e UTP patchcord	PVC, CM	Gray
SKP5UM010GY	1m cat 5e UTP patchcord	PVC, CM	Gray
SKP5UM01FGY	1 feet cat 5e UTP patchcord	PVC, CM	Gray
SKP5UM10FGY	10 feet cat 5e UTP patchcord	PVC, CM	Gray
SKP5UL005BL	0.5m cat 5e UTP patchcord	LSZH	Blue
SKP5UL010BL	1m cat 5e UTP patchcord	LSZH	Blue
SKP5UL01FBL	1 feet cat 5e UTP patchcord	LSZH	Blue
SKP5UL10FBL	10 feet cat 5e UTP patchcord	LSZH	Blue