


# CATEGORY 5E FTP SYSTEM

The channel performance of a system composed of Cat 5e FTP system products can exceed not only the TIA 568B.2 and ISO 1181 Edition 2 for Cat5e/Class D cabling systems but is also capable of providing stable and continual performance up to and beyond 100MHz. It supports IEEE 802.3 1000BASE-T plus other legacy LANS and applications. Contrasted with Cat 6 system, its cost is low and it is easier to install.



SKC5F1M004PR

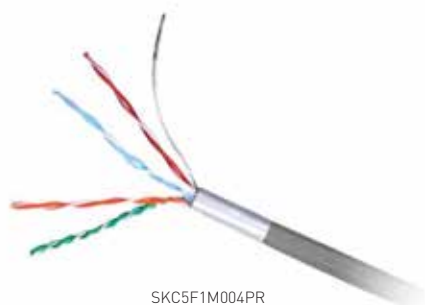

SKP5FM010BL

## ★ Features

|                            |   |
|----------------------------|---|
| Conductor                  | 0.51mm Solid Bare Copper                  |
| Insulation                 | 0.22mm PE                                 |
| Insulation Dia (+/-0.03mm) | 1.00mm                                    |
| Drain wire                 | Tinned Copper                             |
| Outer Dia. (+/-0.2mm)      | 6.3mm                                     |
| Rated Temperature          | 75°C                                      |
| Packing                    | Carton box, wooden reel or cardboard reel |

## ★ Features

- Good margin in channel test
- Universal TIA/EIA 568A or 568B wire map
- 3 $\mu$ -50 $\mu$  gold plate
- Various lengths and colors
- PVC(CM) or LSZH sheath



SKJ5S1N202WH



SKR5S1N124BK

## ★ Features

- ABS material with RoHS certification
- 180 degree dual block
- Color coded TIA/EIA 568A and 568B wire map
- Shielding protects against EMI/RFI interference
- Termination accepts 22-26 AWG solid wires

## ★ Features

- 24 ports with full shielding
- Designed to mount to any standard 19" rack or cabinet
- 90 degree LSA block
- Bold port numbering enables quick and ready identification of outlets
- Color coded TIA/EIA 568A and 568B wire map
- Termination accepts 22,24 26 AWG solid wires

## 🛒 Ordering Information

| Product Number | Description   |
|----------------|---|
| SKC5F1M010PR   | cat 5e 24AWG FTP horizontal cable, PVC (CM) sheath, 305m              |
| SKP5FM010BL    | cat 5e 24AWG FTP patchcords, PVC (CM) sheath, 1.0m                    |
| SKJ5S1N202BK   | cat 5e shielded RJ45 jack, 180° degree dual block, black              |
| SKR5S1N124BK   | 24 port, cat 5e shielded patch panel, 90° degree LSA block, black, 1U |